

CHARGER BOX

User Guide



DE-BC Charger Box

CONTENTS

1 - DESCRIPTION OF THE SYSTEM	3
2 - OVERVIEW	4
3 - CHARGER BOX DESCRIPTION	5
4 - LIST OF SUPPLIED ACCESSORIES	6
5 - TECHNICAL FEATURES	7
6 - WARRANTY	8
7 - TECHNICAL TROUBLESHOOTING	9

1 - DESCRIPTION OF THE SYSTEM



The Charger Box enables to recharge a complete Digitear kit which includes, a BELTPACK, two INEAR and a BELTPACK spare battery.


The recharging is done with the supplied wall adapter.

The Charger Box has a "Nomad" mode to ensure the INEAR recharge, using the spare battery and without needing to use the wall adapter.

The closed Charger Box can be used for storage and transportation.


2 - OVERVIEW

Storage and charging box



User Guide available www.digitear.eu

3 - Charger Box DESCRIPTION

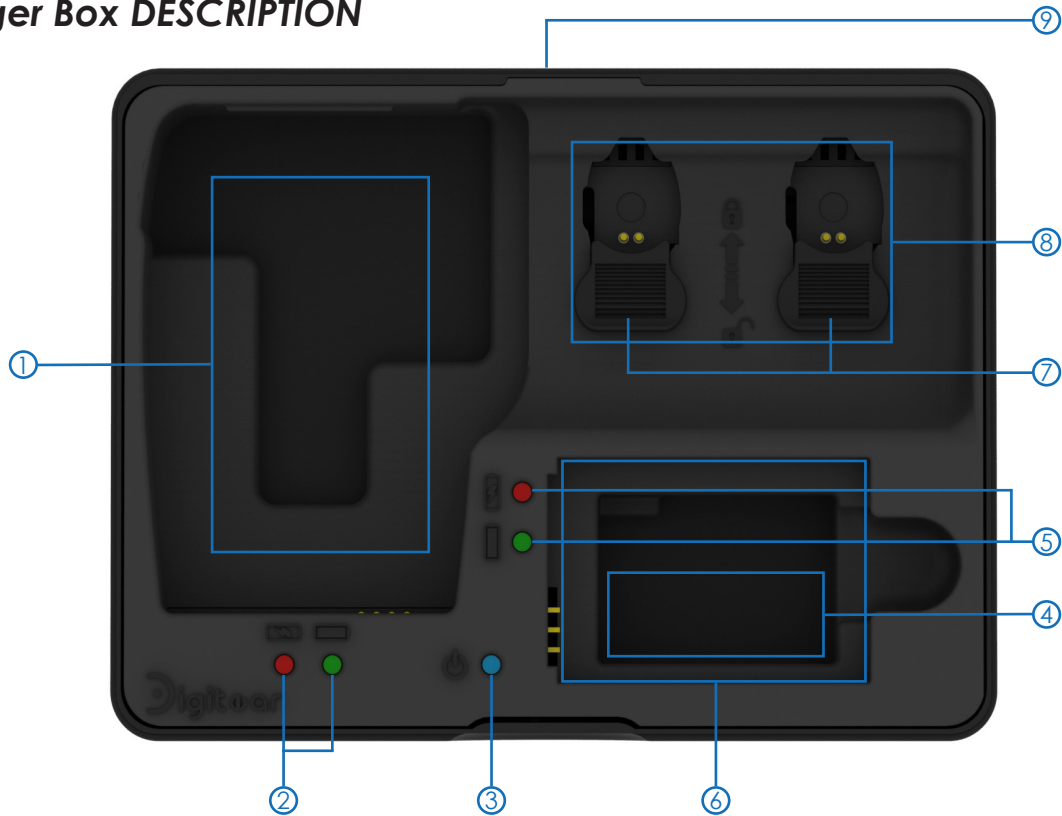

① **BELTPACK location**

BELTPACK charge location

② **LED Charge BELTPACK**

LED has a red color: BELTPACK charging.
LED has a green color: BELTPACK full charge.

③ **LED Power**

LED Blue for powering up the Charger Box through an external power supply.

④ **Earbuds Storage**

Storage for spare earbuds.

⑤ **The Charge LED of the Replacement BELTPACK battery**

Red fixed LED light indicates: BELTPACK is charging.

Green fixed LED light indicates: BELTPACK full charge.

⑥ **Battery Location**

Charging location for the BELTPACK spare battery.

This battery enables the INEAR recharge in nomad mode.

Locking

⑦ Mechanical locking of the INEAR for charging

⑧ **INEAR Location**

INEAR Charge Location

⑨ **Mini USB**

Connector for the external power supply. Compatible mini-USB.

4 - LIST OF SUPPLIED ACCESSORIES



Mini USB Charger 5 V - 1 A

Ref.: VER05US050-MB



BELTPACK Spare Battery
3.7 V - 1200 mAh

Ref.: BL - 5C

5 - TECHNICAL FEATURES

Charger Box

Voltage(DC)	5 V
Current	1 A
Powered by	Mini USB Charger XP Power Ref : VER05US050-MB Input 100 - 240V ~ 50/60 Hz 0,18A, Output 5V = 1A max
Operating conditions (Over heat security)	+5 °C to +45 °C

INEAR Recharge

Charge voltage (DC)	4,2V
Charge current	< 50 mA
Full charging time of a battery	~2 h

BELTPACK spare battery recharge

Charge voltage (DC)	4,2 V
Charge current	< 0,5 A
Full charging time of a battery	~3 h
Number of recharge cycles of the INEAR in nomad mode	~10 times

BELTPACK recharge

Charge voltage (DC)	4,2 V
Charge current	< 0,5 A
Full charging time of a battery	~3 h

6 - WARRANTY

Indoor use only.

Elements NOT covered by the guarantee.

This warranty covers only defects in parts and manufacturing of the product. This warranty does not cover:

- Periodic maintenance and repair or replacement of parts as a result of normal wear and tear.

- Transportation costs and the risks associated with the sending and retrieval of the product by the final customer

- Any adaptation of the product which would be necessary for the purpose of complying with the technical or safety standards applicable in a country other than that for which the product was originally designed and manufactured;

- Consumable elements (elements which are intended to be replaced periodically during the life of the product, for example ear tips, batteries-beyond 12 months to date of purchase-, connecting cables, etc.);

- Damage or defects in the product resulting from:
 - Improper use or installation of the product (use or installation not in accordance with the use to which the product is intended, installation or use not in accordance with the Digitear instructions or the technical or safety standards in force in the country where it is used, etc.)

- Maintenance of the product not in accordance with the Digitear instructions or negligence in the maintenance of the product.

- Improper handling or mistreatment of the product (false maneuvers, fall, shock, immersion, etc.) or an improper environment (poor ventilation, vibration, exposure to moisture, excessive heat, contact with sand or any Other substance, improper power supply, etc.)

- The use of the product with a product (hardware or software), consumable, accessory or peripheral not compatible or defective, an adaptation of the product for the purpose of complying with the technical or safety standards applicable in a country other than that for which the product was originally designed and manufactured;

- A modification or repair of the product not carried out by a service provider approved by Overline Systems

- Cases of force majeure, sinister (fire, flood, etc.), lightning, etc.

- Produit: DIGITEAR (TX-BOX, Charger Box, BELTPACK, INEAR)

Warranty Period:

24 months parts and labor in workshop

Battery: 12 months (starting from the date of purchase)

ACCESS POINT: Covered by the original manufacturer's warranty.

No sole accessory will be accepted or repaired by our repair centers.

7 - TECHNICAL TROUBLESHOOTING

- CHARGE LED is not lighting up

- * Check the contacts.
- * Clean the housing contacts and the elements to be charged
- * Contact the technical support

- No LED Power:

- * Check the adapter connection.
- * Replace the adapter.
- * Contact the technical support